



Impact Parameter Resolution

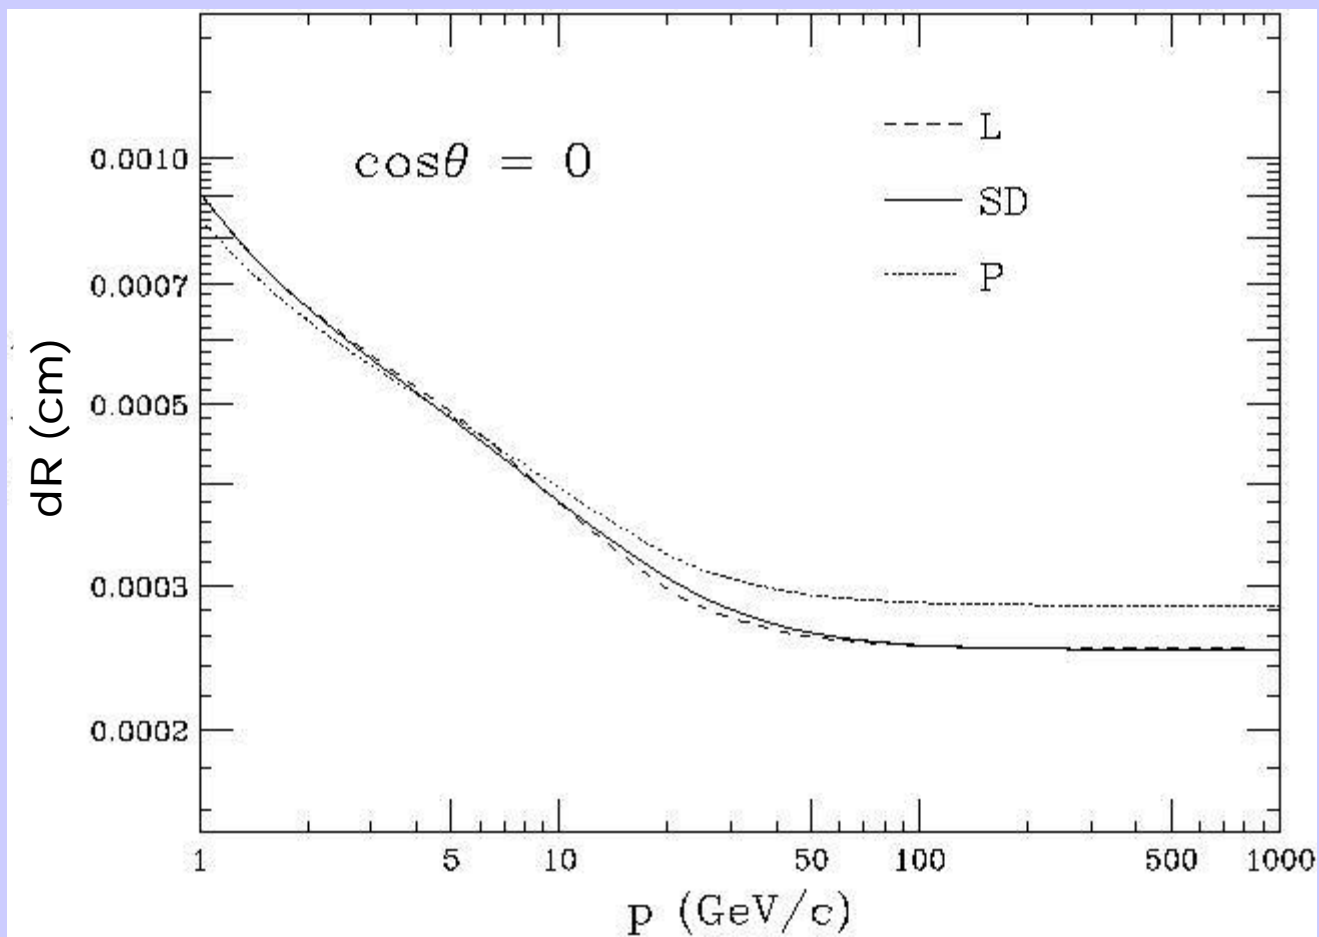


B. Schumm

Flavor Tagging

b tag efficiency vs purity

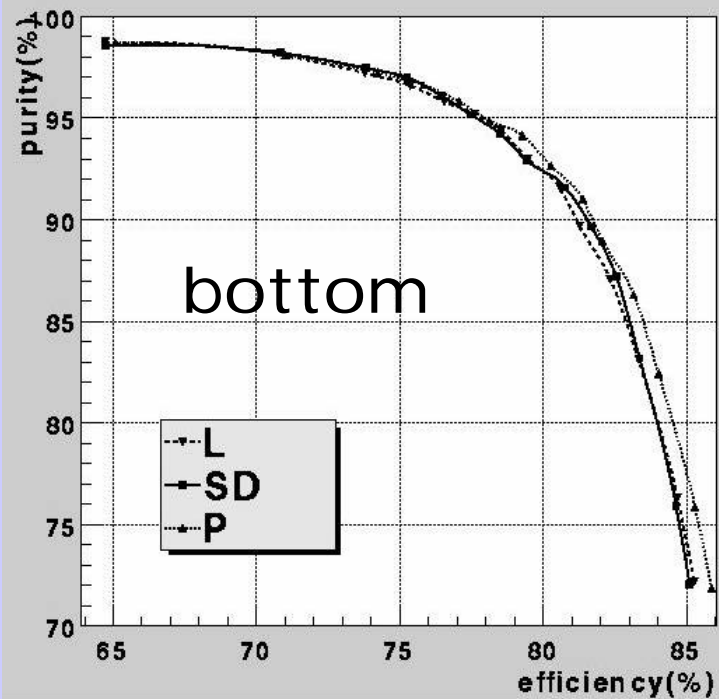

c tag efficiency vs purity


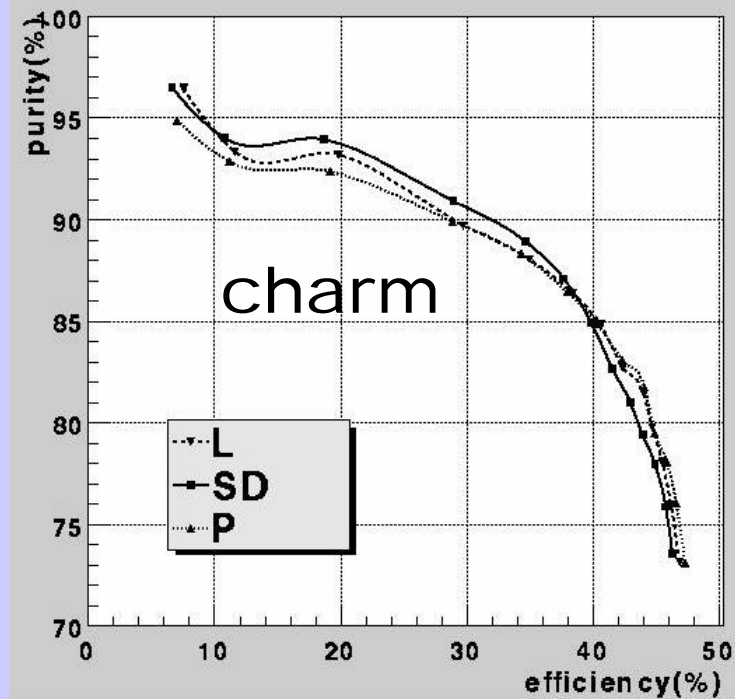


T. Abe

Tracking

	<u>L</u>	<u>SD</u>	<u>P</u>
Inner Radius	50 cm	20 cm	25 cm
Outer Radius	200 cm	125 cm	150 cm
Layers	144	5	122
	TPC	Si drift or μ strips	TPC
Fwd Disks	5	5	5
	double-sided Si	double-sided Si	double-sided Si
B(Tesla)	3	5	3

Tracking Resolution

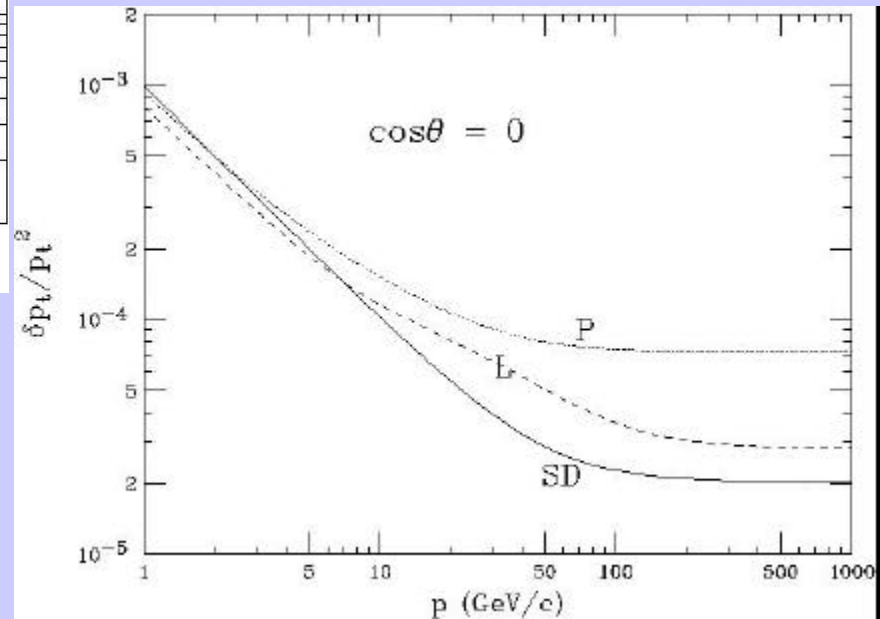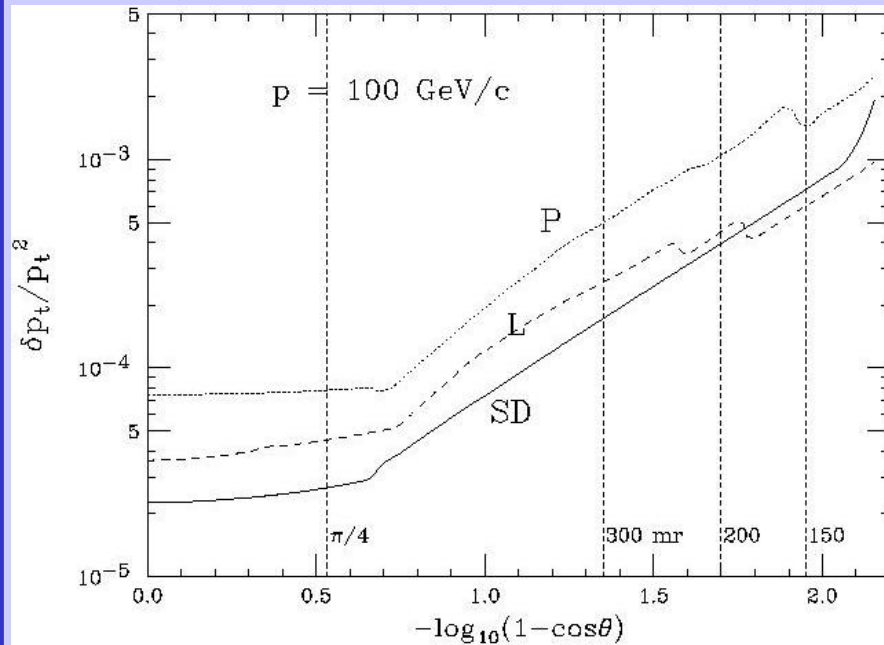


B. Schumm

Calorimeters


	<u>L</u>	<u>SD</u>	<u>P</u>
EM Tech	Pb/scin (4mm/1mm)x40	W/Si (2.5mm/gap)x40	Pb/scin (4mm/3mm)x32
Had Tech	Pb/scin	Cu or Fe/RPC (or Pb)	Pb/scin
Inner Radius	196 cm	127 cm	150 cm
EM-outer Radius	220 cm	142 cm	185 cm
HAD-outer Radius	365 cm	245 cm	295 cm
Solenoid Coil	outside Had	outside Had	between EM/Had
EM trans. seg.	40 mr	4 mr	30 mr
Had trans. seg.	80 mr	80 mr	80 mr

Calorimeter Resolution

Jet energy resolution

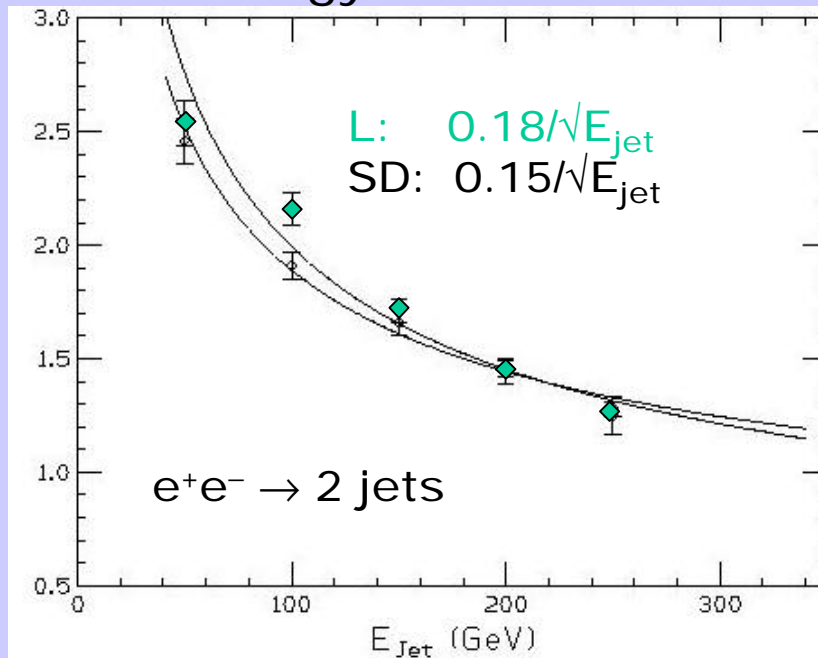

Di-jet mass resolution

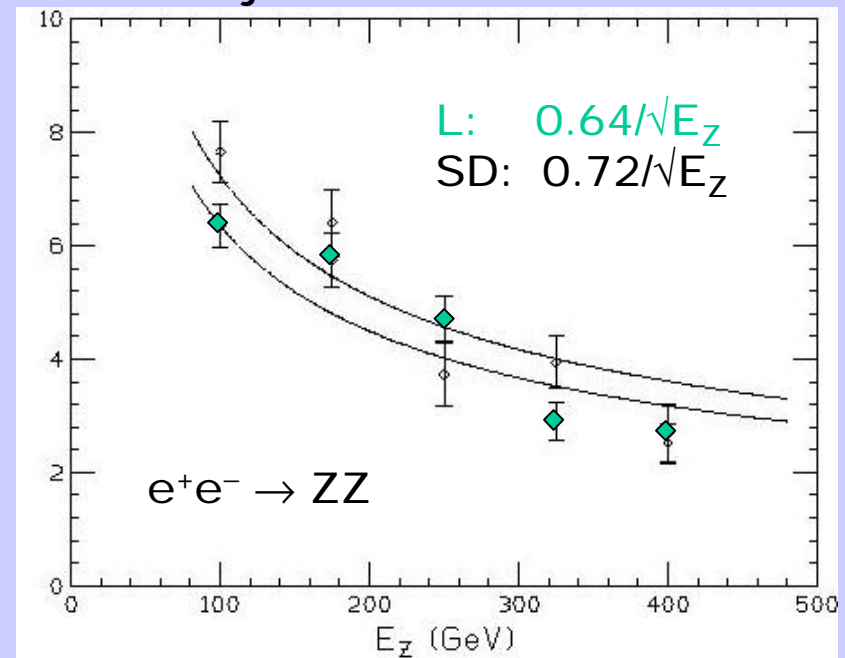

These are idealized studies, and resolutions will be worse.

R. Frey

EM resolution:

L: $\sigma_{EM} / E = (17\% / \sqrt{E}) \oplus (\sim 1\%)$

SD: $\sigma_{EM} / E = (18\% / \sqrt{E}) \oplus (\sim 1\%)$

Muon Detection

Model L

24 × 5 cm Fe plates + RPCs

$\sigma_{r\theta} \approx 1 \text{ cm (x 24)}$ $\sigma_z \approx 1 \text{ cm (x 4)}$
coverage to ~ 50 mrad

Model SD

24 × 5 cm Fe plates + RPCs

$\sigma_{r\theta} \approx 1 \text{ cm (x 24)}$ $\sigma_z \approx 1 \text{ cm (x 4)}$
coverage to ~ 50 mrad

Model P

10 × 10 cm Fe plates + RPCs

$\sigma_{r\theta} \approx 1 \text{ cm (x 10)}$ $\sigma_z \approx 1 \text{ cm (x 2)}$
coverage to ~ 50 mrad

NLC Cost Estimates

General considerations:
Based on past experience
Contingency = ~ 40%
Designs constrained

HE IR	
L	359.0 M\$
SD	326.2 M\$
LE IR	
P	210.0 M\$

NLC Cost Estimates

	L	SD	P
1.1 Vertex	4.0	4.0	4.0
1.2 Tracking	34.6	19.7	23.4
1.3 Calorimeter	48.9	60.2	40.7
1.3.1 EM	(28.9)	(50.9)	(23.8)
1.3.2 Had	(19.6)	(8.9)	(16.5)
1.3.3 Lum	(0.4)	(0.4)	(0.4)
1.4 Muon	16.0	16.0	8.8
1.5 DAQ	27.4	52.2	28.4
1.6 Magnet & supp	110.8	75.6	30.5
1.7 Installation	7.3	7.4	6.8
1.8 Management	7.4	7.7	7.4
SUBTOTAL	256.4	242.8	150.0
1.9 Contingency	102.6	83.4	60.0
Total	359.0	326.2	210.0

Example Issues

1. What are the physics reasons for wanting exceptional jet energy (mass) resolution? How do signal/backgrounds and sensitivities vary as a function of resolution? Is mass discrimination of W and Z in the dijet decay mode feasible, and necessary?
2. How does energy flow calorimetry resolution depend on such variables as Moliere radius, $\Delta\theta/\Delta\phi$ segmentation, depth segmentation, inner radius, B field, number of radiation lengths in tracker, etc.?
3. What benefits arise from very high precision tracking (e.g. silicon strip tracker); what are the limitations imposed by having relatively few samples, by the associated radiation budget? What minimum radius tracker would be feasible?
4. Evaluate the dependence of physics performance on solenoidal field strength and radius.

The R&D Program

- Many topics require work
- The follow few transparencies list many of the issues
- see also
 - the following talks
 - the report from the International R&D committee

The R&D Program

Calorimetry

energy flow

need detailed simulation

followed by prototype beam test demonstration

further develop physics cases for excellent energy flow

eg. Higgs self-coupling, WW/ZZ at high energy, recon of top and W
for anomalous couplings?, others (SUSY, BR(H>160))

integrate E-flow with flavor tagging

study readout differences for Tesla/NLC

importance of K0/Lambda in energy flow calorimeter

parametrize E-flow for fast simulation

forward tagger requirements

study effect of muons from collimators/beamline

further development of simulation

clustering

tracking in calorimeter

digital calorimeter

study parameter trade-offs (R seg, layers, coil location, transverse seg.)

in terms of general performance parameters

in terms of physics outcome

refine fast-sim parameters from detailed simulation

integrate electronics with silicon detectors in Si/W

reduce silicon detector costs

engineer reduced gaps

mechanical/assembly issues

B = 5 Tesla?

can scintillating tile Ecal compete with Si/W in granularity, etc.?

crystal EM (value/advantages/disadvantages)

barrel/endcap transition (impact and fixes)

The R&D Program

Tracking

refine the understanding of backgrounds
tolerance of trackers to backgrounds
 will large background be a problem for the TPC (field distortions, etc)
 are ionic space charge effects understood?
study pattern recognition for silicon tracker (include vxd)
study alignment and stability of silicon tracker
what momentum resolution is required for physics,
 eg. Higgs recoil, slepton mass endpoint, low and high energy
understand tracker material budget on physics
physics motivation for dE/dx (what is it?)
detailed simulation of track reconstruction, especially for a silicon option,
 complete with backgrounds and realistic inefficiencies
 include CCDs (presumably) in track reconstruction
timing resolution
readout differences between Tesla/NLC time structure
role of intermediate layer
tracking errors in energy flow (study with calorimeter)
forward tracking role with TPC
alignment (esp. with regard to luminosity spectrum measurement)
develop thorough understanding of trade-offs in TPC, silicon options
large volume drift chamber (being developed at KEK)
development of large volume TPC (large European/US collaboration at work)
development of silicon microstrip and silicon drift systems
 (being developed in US & Japan)
study optimal geometry of barrel and forward system
two track resolution requirements (esp. at high energy)
 this impacts calorimetry - how much?
study K_0 and Λ efficiency
 impacts calorimetry?
2D vs. 3D silicon tracker

The R&D Program

Vertex Det

- resolve discrepancy in Higgs BR studies
- understand degradation of flavor tagging with real physics events
 - compared to monojets (as seen in past studies)
- understand requirements for inner radius, and other parameters
 - what impact on physics
- develop hardened CCDs
- develop CCD readout, with increased bandwidth
- develop very thin CCD layers (eg. stretched)
- segmentation requirements (two track resolution)
 - 500 GeV u,d,s jets
 - pixel size

Muons

- requirements for purity/efficiency vs. momentum on physics channels
- understand role in energy flow (work with calorimetry)
 - detailed simulation
 - prototype beam tests
- mechanical design of muon system
- development of detector options, including scintillator and RPCs

The R&D Program

Beamline, etc.

- luminosity spectrum measurement
- beam energy measurement
- polarization measurement
- positron polarization
 - systematics of the Blondel scheme
- veto gamma-gamma very forward system

General

is calibration running at Z^0 peak essential/useful/useless?

Comment

In general it would be good if more work was done exercising the simulation code that has been put together under the leadership of Norman Graf. Much work has been devoted toward developing a detailed full simulation.

North American Leadership

New leadership of Physics and Detectors Working Group
(established by lab directors)

Jim Brau, co-leader

Mark Oreglia, co-leader

Executive Committee

Ed Blucher

Dave Gerdes

Lawrence Gibbons

Dean Karlen

Young-kee Kim

Jeff Richman

Rick van Kooten

North American Leadership

Facilitate the progress of the working groups
in developing the plans for the LC experiments

Issues of focus

the variables of the LC - how important to physics?

time structure

energy spectrum

energy reach and expansion, luminosity

two detectors?

Positron polarization

Gamma-gamma

electron-electron and gamma-electron

advance the understanding of key detector issues

eg. energy flow calorimetry

background tolerance

vertex detector readout

Coming Meetings

- North American
 - June 27-29, UC-Santa Cruz
- Other regions
 - April 12-15, St. Malo, France (DESY/ECFA)
 - July 10-12, Tokyo, Japan (5th ACFA Workshop)
- International
 - August 26-30, Jeju I s., Korea (LCWS 2002)

Conclusions

The goals for the Linear Collider Detectors will push the state-of-the-art in a number of directions.

- eg. finely segmented calorimetry for energy-flow measurement
- pixel vertex detectors (approaching a billion pixel system)
- integrated readout

Many techniques remain to be understood and developed.

see the following talks

Please get involved in your local effort and connect to the North American effort.

come to Santa Cruz, June 27-29